


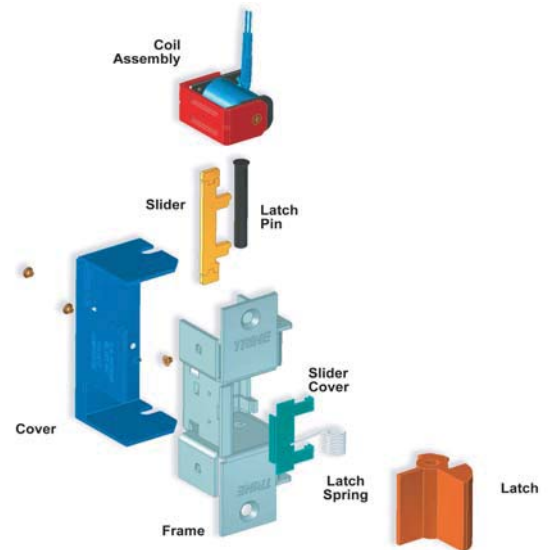

EN SERIES...The Simple Strike

10 Different Models for Cylindrical and Mortise Locks and Rim Exit Devices

Simplicity at its Best!

**Only
8
Parts**



- ✦ Grade 1
- ✦  Three-Hour Fire-Rated
- ✦  Burglary-Rated Indoor/Outdoor
- ✦ 1,000,000 + life cycles
- ✦ 2,000 + lbs. holding force
- ✦ One Moving Part in Locking Mechanism
- ✦ One COIL
- ✦ Stainless Steel Construction
- ✦ Latch Bolt Sensor Available

10 Different Models Available For All Your Needs!

400, 430*, 435*, 800, 850, 900, 950, 960

*Specify Left or Right Handing

AVAILABLE FINISHES:

- US3 - Bright Brass
- US4 - Satin Brass
- US10 - Satin Bronze
- US10B - Dark Bronze
- US26 - Bright Chrome
- US32D - Satin Stainless Steel

VOLTAGE	CURRENT/AMPS	OHMS	DUTY	SOUND
12VAC	.70	4.5	Intm.	Buzz
24VAC	.37	18.0	Intm.	Buzz
12VDC	.28	43.0	Intm/Cont.	Silent
24VDC	.15	164.0	Intm/Cont.	Silent



Axion 4800 - The Smart Strike

Absolutely No Cutting!
For Rim Panic Devices



4800



4801*

- ✦ Only 3 holes to drill for installation
- ✦ Built-in electronics **AUTOMATICALLY allow 12 THRU 24 AC/DC**
- ✦ Optional four-pin Anchoring System for extra strength **included**
- ✦ One Piece Locking Mechanism
- ✦ One Solenoid
- ✦ Stainless Steel Construction
- ✦ Fail Secure/Fail Safe

- ✦ Field Selectable
 - ✦ 1,500,000 + life cycles
 - ✦ 3,000 + lbs. holding force
 - ✦ 1/8" Steel Spacer **included**
- AVAILABLE FINISHES:**
 US3 - Bright Brass
 US4 - Satin Brass
 US10 - Satin Bronze
 US10B - Dark Bronze
 US26 - Bright Chrome
 US32D - Satin Stainless Steel

VOLTAGE	PULL IN/ HOLD AMPS	DUTY	SOUND
12DC	.566/.217	Intm./Cont.	Silent
24DC	.253/.099	Intm./Cont.	Silent
12AC	.509/.181	Intm./Cont.	Silent
16AC	.402/.149	Intm./Cont.	Silent
24AC	.215/.087	Intm./Cont.	Silent









* THE 4801 WORKS WITH THE SECURE BOLT™ & SQUARE BOLT™ EXIT DEVICES.

4800 vs. 9600

FEATURE	TRINE	HES
Frame cutting	None	None
Number of locking mechanisms	1	2
Number of holding points in mounting system	Up to 6	3
Operating Voltage	12 THRU 24 AC/DC (only two wires to connect)	12 or 24 DC (Wires must cut and tied off for 24 DC)
Built-in surge and kickback protection	Yes	No - Optional
Holding force	3000 + lbs.	1500 lbs.
Life cycles	1,500,000+	500,000
1/8" steel spacer plate included	Yes	No - Optional
Field Selectable Fail Safe/Fail Secure	Yes	Yes
Horizontal locking screws	Yes	Yes
Non Handed	Yes	Yes
Accommodating up to 3/4" Pullman Latch	Yes	Yes
Plug-in connectors	Yes	Yes
BHMA Grade 1	Yes	Yes

Wilco Supply
 5960 Telegraph Ave.
 Oakland, CA 94609

MODULAR SERIES FACE PLATES

Product	Application	Specifications	Finishes
234 	<i>Smallest Electric Strike in the World</i> For new or replacement installations in metal frames . Use with cylindrical locksets with up to 5/8" throw , based on 1/8" door gap.	* ANSI 2 3/4" Standard * Face Plate 2-3/4" x 1-1/8" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	234-3 - Bright Brass 234-4 - Satin Brass 234-10B - Dark Bronze 234-26D - Satin Chrome
334 	For new or replacement installations in wood frames . Use with cylindrical locksets with up to 5/8" throw , based on 1/8" door gap.	* Face Plate 3-3/4" x 1-1/4" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	334-3 - Bright Brass 334-4 - Satin Brass 334-26D - Satin Chrome
258 	<i>80% LESS FRAME CUTTING when compared to typical 4 7/8" electric strike installations.</i> For new or replacement installations in aluminum frames . Use with 4510, 4710 & 4750 Adams Rite dead latches. Replaces 4502 strike plate with slight frame modification	* Face Plate 2-3/4" x 1-1/8" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	258-10B - Dark Bronze 258-26D - Satin Chrome
458  <p>GRADE 1</p>	<i>80% LESS FRAME CUTTING. Fills the frame preparation of Adams Rite MS Locks without relocating tabs for 6 5/8" or 6 7/8" electric strikes.</i> For new or replacement installations in aluminum frames . Replaces Adams Rite 4730/4501 strike plate with slight frame modification.	* Face Plate 4-5/8" x 1-9/16" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	458-10B - Dark Bronze 458-32D - Satin Stainless MUST SPECIFY LEFT OR RIGHT HAND
478  <p>GRADE 1</p>	<i>60% LESS FRAME CUTTING of Frame Face for ANSI 4 7/8" pre-prep frames.</i> For new or replacement installations in wood, metal or aluminum frames . Use with cylindrical locksets having up to 5/8" throw , based on 1/8" door gap.	* ANSI A115.1 slight frame modification * Face Plate 4-7/8" x 1-1/4" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	478-3 - Bright Brass 478-4 - Satin Brass 478-10B - Dark Bronze 478-26 - Bright Chrome 478-32D - Satin Stainless
478LO/478RO  <p>GRADE 1</p>	<i>60% LESS FRAME CUTTING of Frame Face for ANSI 4 7/8" pre-prep frames.</i> For new or replacement installations in wood, metal or aluminum frames . The strike opening on this face plate is offset by 3/16" the center to accommodate door sag.	* Face Plate 4 7/8" x 1-1/4" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	478-10B - Dark Bronze 478-26 - Bright Chrome 478-32D - Satin Stainless MUST SPECIFY LEFT OR RIGHT HAND
234X-375 	Standard ANSI prep features an extended ramp to accommodate additional frame face of Timely or RediFrame . Ramp is extended 3/8". For new or replacement installations. Use with cylindrical locksets and deadlatches having up to 5/8" throw , based on 1/8" door gap.	* ANSI 2 3/4" Standard * Face Plate 2-3/4" x 1-1/8" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	234X-3 - Bright Brass 234X-10B - Dark Bronze 234X-26D - Satin Chrome
478X-375  <p>GRADE 1</p>	Frame features an extended ramp to accommodate additional frame face of Timely and RediFrame . Ramp is extended 3/8". For new or replacement installations. Use with cylindrical locksets and deadlatches having up to 5/8" throw , based on 1/8" door gap.	* ANSI A115.1 slight frame modification * Face Plate 4-7/8" x 1-1/4" * Mortise Backset 1" * Cavity Depth 1/2" * Cavity Width 5/8" * Cavity Height 1 1/8"	478X-3 - Bright Brass 478X-10B - Dark Bronze 478X-32D - Satin Stainless

The Small Strike...

3000 Series


FEATURES:

- ✦ 500,000 + life cycles
- ✦ 1,200 + lbs. holding force (1,500 lbs. for 458, 478)
- ✦ Dynamic Force 70 ft/lb
- ✦ Solid cast stainless steel latch
- ✦ Micro solenoid assembly
- ✦ Non-handed (excepts 3458, 3478 offset)
- ✦ Fail secure - standard action (unlocks with power)
- ✦ Fail safe - "RS" (locks with power)
- ✦ Latch spacer increases cavity depth 1/16"

STANDARDS:

- ✦ BHM A - A156.31, 2001
- ✦ BHMA, Grade 1 - 3458 & 3478 models
- ✦ BHMA, Grade 2 - 3234, 3234W & 3258 models
- ✦ Patent #6, 634, 685

LC Models utilize an external line conditioner module to regulate input voltages, 12-24 AC or DC, and conditions the output for the pull-in activation period. Then reduces holding voltage output for continuous operation.

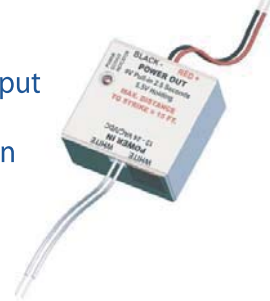

OPTIONS:

Piezo Buzzer for "Standard Models"

BZ-12 Audible buzzer for 12DC power

BZ-24 Audible buzzer for 24DC power

Piezo Buzzer for "LC Models"

BZ-6 Audible buzzer for 6DC power

VOLTAGE	CURRENT/AMPS	OHMS	DUTY	SOUND	WIRE COLOR	MODEL
12VDC	.480	25	Intm.	Silent	Blue	STD.
24VDC	.240	100	Intm.	Silent	White	STD.
LC/RS	PULL IN/HOLD AMPS					
12VDC	.743/.298	13	Intm./Cont.	Silent	Red	LC
12VAC	.715/.277	13	Intm./Cont.	Silent	Red	LC
24VDC	.397/.170	13	Intm./Cont.	Silent	Red	LC
24VAC	.378/.173	13	Intm./Cont.	Silent	Red	LC

MECHANISM BODY

The flexibility to stock mechanisms separately from face plates



MODEL	VOLTAGE	FUNCTION	DUTY
3012	12DC	Fail Secure	Intm.
3024	24DC	Fail Secure	Intm.



Line Conditioner (LC) and Fail Safe (RS) Models:

MODEL	VOLTAGE	FUNCTION	DUTY
30LC	12 THRU 24 AC/DC	Fail Secure	Cont.
30RS	12 THRU 24 AC/DC	Fail Safe	Cont.

✦ **AXION = OPTIONS** ✦

www.wilcosupply.com