

MAILBOX HARDWARE

1250 Series Vertical Mailbox



The Auth-Florence 1250 Series Vertical Mailbox is available from three to seven compartments. Constructed of durable heavy gauge extruded aluminum. Doors and trim are striated to resist scratching. Full mounting frame ensure complete enclosure of mail compartments.

Note: U.S. Postal Service approved for replacement purposes


Row	Wallcut Depth	Wallcut Height	Overall Height
Single	6 ³ / ₄ "	17 ³ / ₄ "	19 ¹ / ₈ "
Double	6 ³ / ₄ "	37"	38 ¹ / ₂ "

Number of Units

Single Row	Double Row	Layout Per Row	Wall Cut Width	Overall Width
3	6	3	17 1/2	19
4	8	4	23	24 1/2
5	10	5	28 5/8	30 1/8
6	12	6	34 1/8	35 5/8
7	14	7	39 5/8	41 1/8
8	16	4-4	47 1/2	49
9	18	5-4	53 1/8	54 5/8
10	20	5-5	58 3/4	60 1/4
11	22	6-5	64 1/4	65 3/4
12	24	6-6	69 3/4	71 1/4
13	26	7-6	75 1/4	76 3/4
14	28	7-7	80 3/4	82 1/4
15	30	5-5-5	88 7/8	90 3/8
16	32	5-6-5	94 3/8	95 7/8

Single Row	Double Row	Layout Per Row	Wall Cut Width	Overall Width
17	34	6-6-5	99 7/8	101 3/8
18	36	6-6-6	105 3/8	106 7/8
19	38	6-6-7	110 7/8	112 3/8
20	40	7-7-6	116 3/8	117 7/8
21	42	7-7-7	121 7/8	123 3/8
22	44	6-6-6-4	129 7/8	131 3/8
23	46	6-6-6-5	135 1/2	137
24	48	6-6-6-6	141	142 1/2
25	50	7-6-6-6	146 1/2	148
26	52	7-7-7-5	152	153 1/2
27	54	7-7-7-6	157 1/2	159
28	56	7-7-7-7	163	164 1/2
29	58	6-6-6-6-5	171 1/8	172 5/8
30	60	6-6-6-6-6	176 5/8	178 1/8

Installation Drawings

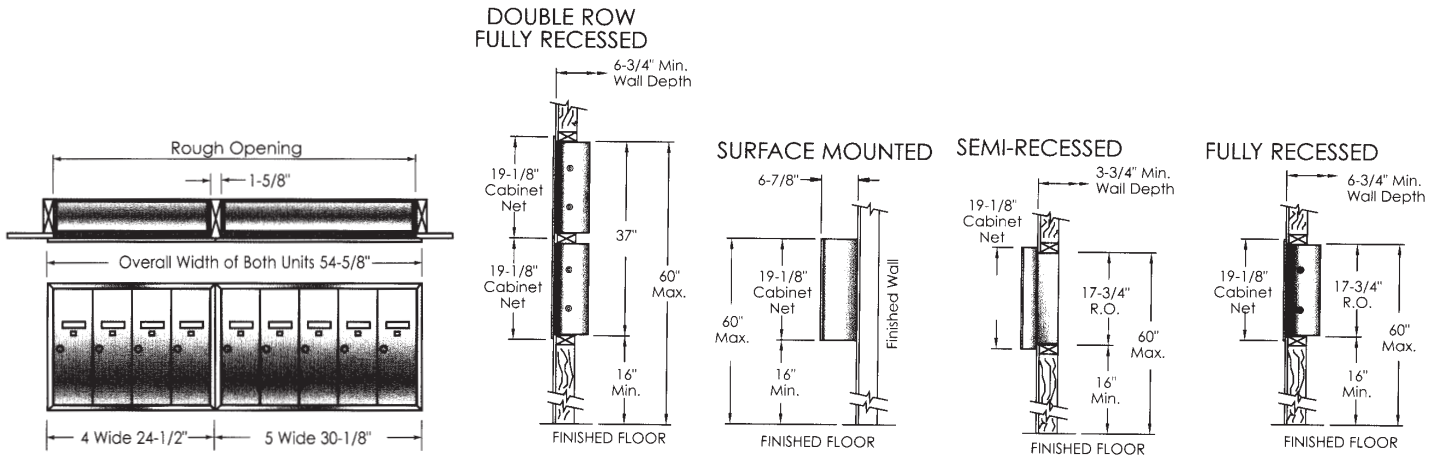

Mounting

- Recessed 6³/₄" (surface mounting requires SM125 collar)

Door Size

- 16"H x 5¹/₂"W

Compartment Size

- 16¹/₂"H x 5"W x 6"D

Locks

- 5 pin cylinder lockswitch, 2 keys
- 1,000 key changes

Door ID

- Boxes must be identified from left to right in numerical or alphabetical order
- Tenant name card holder standard

Finishes

- Anodized Aluminum (A), Anodized Gold (G), Duranodic (D)

Part No.

Description

AUT 1250-3A	Apt. Mail Box	AUT 1250-5G
AUT 1250-3D*		AUT 1250-6A
AUT 1250-3G		AUT 1250-6D*
AUT 1250-4A		AUT 1250-6G
AUT 1250-4D*		AUT 1250-7A
AUT 1250-4G		AUT 1250-7D*
AUT 1250-5A		AUT 1250-7G
AUT 1250-5D*		*F/O

MAILBOX HARDWARE


Full Surface Collar



Collars are shipped in kit form for assembly at job site.

Part No.	Description
AUT SM-125-3A	Surface Collar
AUT SM-125-3D F/O	
AUT SM-125-3G	
AUT SM-125-4A	
AUT SM-125-4D F/O	
AUT SM-125-4G	
AUT SM-125-5A	
AUT SM-125-5D F/O	
AUT SM-125-5G	
AUT SM-125-6A	
AUT SM-125-6D F/O	
AUT SM-125-6G	
AUT SM-125-7A	
AUT SM-125-7D F/O	
AUT SM-125-7G	

Surface Mount Directories

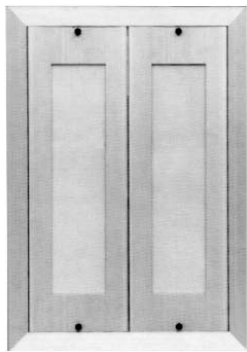


Surface mount directories, available in finishes to match the mailboxes. Completely assembled at the factory. Clear plastic window, metal back plate and ruled blank name card included. Available on Factory Order.

Model Name	Qty.	Height x Width
D-300-1	40	19 1/8 x 77/8"
D-300-2	80	19 1/8 x 135/16"
D-300-3	120	19 1/8 x 187/8"
D-300-4	160	19 1/8 x 243/8"
D-300-5	200	19 1/8 x 297/8"

To Order:

Part No.	Description
AUT D-300-1A	Directories
AUT D-300-1D	
AUT D-300-1G	
AUT D-300-2A	
AUT D-300-2D	
AUT D-300-2G	
AUT D-300-3A	
AUT D-300-3D	
AUT D-300-3G	
AUT D-300-4A	
AUT D-300-4D	
AUT D-300-4G	
AUT D-300-5A	
AUT D-300-5D	
AUT D-300-5G	

Collection Letter Box



Aluminum door, frame and heavy gauge metal compartment. Engraved letters 1" high. Wall cut out side 17 5/8"H x 13 5/8"W x 6 3/4"D, recessed 6 1/2". Available on Factory Order.

Part No.	Finish
AUT 120R-A	Anodized Aluminum
AUT 120R-G	Anodized Gold

Key Keeper Boxes

Key Keeper Boxes allow the front door of a multiunit building to be locked and the key to the door stored safely in the key keeper. The key keeper is locked with the specified master lock.



Model K26 features heavy gauge US32D brushed stainless steel construction. The key is loose in the box and the door is prepped for a USPS lock.

Part No.:	Interior Dimensions	Exterior Dimensions	Rough Opening
AUT K26	2 1/8 H x 4 5/8 W x 1 5/8" D	3 1/4 H x 6 W x 1 15/16" D	4 1/2 H x 5 W x 1 3/4" D



The model KK features extruded aluminum construction. The key is loose in the box and the door is prepped for a USPS lock. Can be surface mounted with an optional surface collar.

Part No.:	Interior Dimensions	Exterior Dimensions	Rough Opening
AUT KK A	4 7/8 H x 4 1/8 W x 2" D	6 3/4 H x 6 1/4 W x 2 3/8" D	8 1/4 H x 4 3/8 W x 2 1/4" D

Mail Box Systems

The new U.S. Postal Service Standard 4C includes the following specifications:

- A new compartment form factor minimum size requirement of 12"W x 15"D x 3"H
- Introduces a parcel locker requirement based on a 1:10 parcel locker to customer compartment ratio
- Strengthens security requirements for the entire receptacle
- Meets Americans with Disabilities Act (ADA) standards

Standard Features of Auth-Florence 4C Horizontal Mail Systems:

- Designed to meet or exceed USPS 4C standards for security and performance
- Rugged, corrosion resistant weatherproof powdercoat finish resists scratching and vandalism
- Constructed of heavy gauge aluminum and 300 series stainless steel
- Master loading doors designed with interlocking overlap seams to prevent prying
- Quick release master loading door lock latch for easy access by Postal carriers
- Unique double-locking parcel locking mechanism design (patent pending) for added mail package security
- New USPS-1172 910A lock with three (3) keys
- Front and rear load units available
- Number decals up to three digits or engraved identification up to six characters
- Model design provides flexibility for laying out multi-unit mailbox configurations

Auth-Florence 4C Horizontal Mail Systems <i>Quick Reference Dimension & Weight Chart</i>							
Suite A	39" Unit Height	ROUGH OPENING HEIGHT: 38-1/16"					
		ROUGH OPENING DEPTH: 16-3/8" Minimum					
		<i>Model</i>	<i>RO Width</i>	<i>Actual Width</i>	<i>Weight (lbs)</i>	<i># Tenants</i>	<i># Parcels</i>
		4CAT8-19	29-15/16"	30-9/16"	96.5	19	0
		4CAT2-15	29-15/16"	30-9/16"	94	15	1
		4CAT1-4	15-11/16"	16-5/16"	51.5	4	1
Suite B	18" Unit Height	ROUGH OPENING HEIGHT: 17-1/16"					
		ROUGH OPENING DEPTH: 16-3/8" Minimum					
		<i>Model</i>	<i>RO Width</i>	<i>Actual Width</i>	<i>Weight (lbs)</i>	<i># Tenants</i>	<i># Parcels</i>
		4CBT8-7	29-15/16"	30-9/16"	47	7	0
		4CBT2-3	29-15/16"	30-9/16"	45	3	1
		4CBT6-3	15-11/16"	16-5/16"	26	3	0
Suite C	51-1/4" Unit Height	ROUGH OPENING HEIGHT: 50-5/16"					
		ROUGH OPENING DEPTH: 16-3/8" Minimum					
		<i>Model</i>	<i>RO Width</i>	<i>Actual Width</i>	<i>Weight (lbs)</i>	<i># Tenants</i>	<i># Parcels</i>
		4CCT2-16	29-15/16"	30-9/16"	123.5	16	2
		4CCT1-7	15-11/16"	16-5/16"	62	7	1
		4CCT10	15-11/16"	16-5/16"	55.5	0	3
Suite D	21-1/2" Unit Height	ROUGH OPENING HEIGHT: 20-9/16"					
		ROUGH OPENING DEPTH: 16-3/8" Minimum					
		<i>Model</i>	<i>RO Width</i>	<i>Actual Width</i>	<i>Weight (lbs)</i>	<i># Tenants</i>	<i># Parcels</i>
		4CDT8-9	29-15/16"	30-9/16"	56	9	0
		4CDT2-5	29-15/16"	30-9/16"	55.5	5	1
		4CDT2-4	29-15/16"	30-9/16"	54.5	4	1
4CDT6-4	15-11/16"	16-5/16"	31	4	0		
4CDT10	15-11/16"	16-5/16"	24	0	1		
<i>R.O. Height & Width on all Models Tolerant to +1/4" -0"</i>							

Calculating Rough Openings for 4C Horizontal Mailbox Installations

Independent 4C Installations —

To install a 4C horizontal unit independently (between wall studs) use the quick reference chart on the previous page to find Rough Opening (RO) measurements for height, width and depth.


Multi-Unit 4C Installations in Single Rough Opening —

To install multiple 4C horizontal units within a single RO, use the quick reference chart for the height and depth.

Use this formula to calculate RO width:

RO Width for Multi-Unit 4C Installation = (the sum of all actual unit widths) – 1/2"

USPS STD-4C Compliant Mailbox Systems are Mandatory on all NEW CONSTRUCTION and MAJOR RENOVATIONS

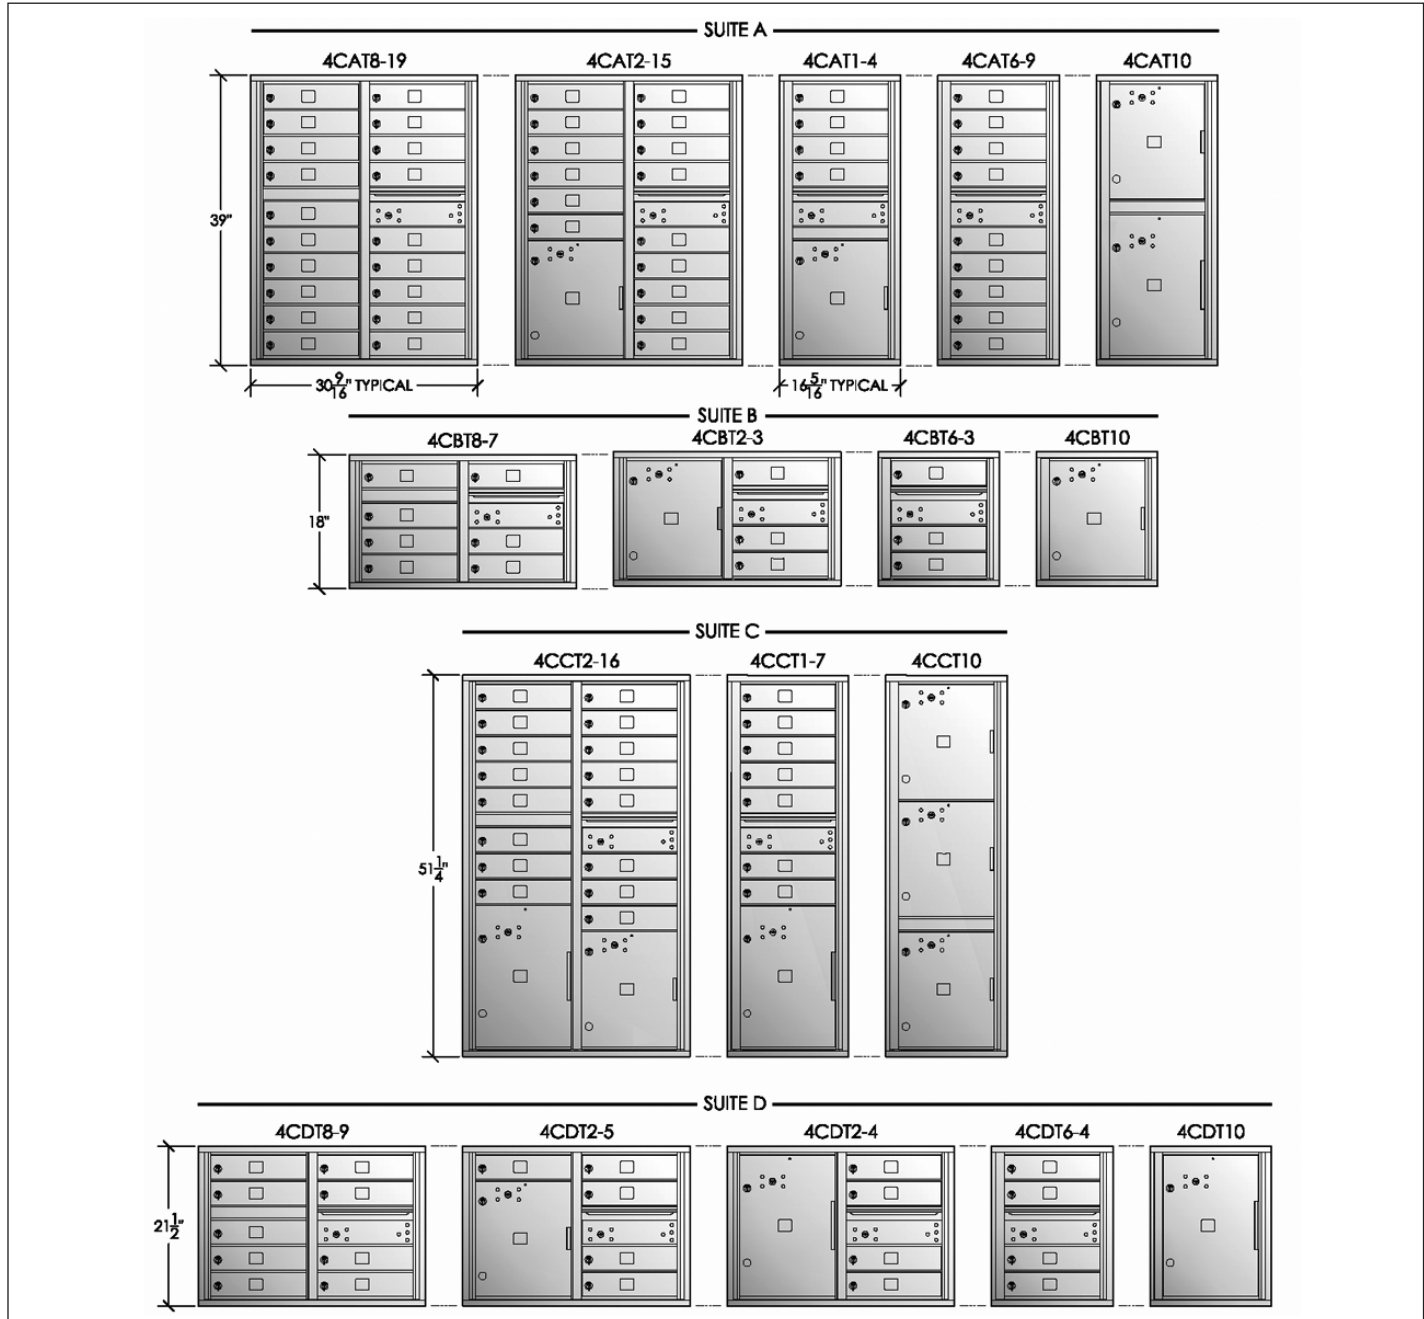

Powdercoat Paint Color Options:

- Blonde Gold*
- Bright Gold*
- Silver Speck
- Postal Grey
- Black
- Dark Bronze
- White
- Forest Green
- Sandstone

**Note: Blonde Gold and Bright Gold paints are not rated for outdoor use and are intended for inside installations only. All other powdercoat paint colors available are weather resistant and may be used for indoor or outdoor installations.*