


**PINS**

**Bottom Pins**

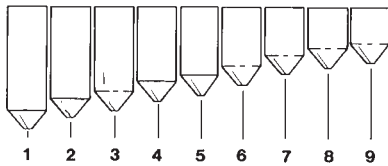


The same ASSA Twin Pins are used in both Twin/6000 and Twin V-10 cylinders. The deepest cut on a Twin key is the #1 and the shallowest is the #9. This makes the #1 pin the longest and the #9 pin the shortest. All pins are 0.114" in diameter.

Part No.	Description
ASS 867078	Bottom Pins #1
ASS 867079	Bottom Pins #2
ASS 867080	Bottom Pins #3
ASS 867081	Bottom Pins #4
ASS 867082	Bottom Pins #5
ASS 867083	Bottom Pins #6
ASS 867084	Bottom Pins #7
ASS 867085	Bottom Pins #8
ASS 867086	Bottom Pins #9

*Pins listed above use the 867065 Cylinder Spring.*

**Master Pins**

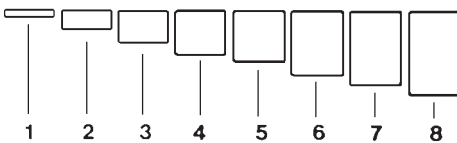


ASSA Twin Master Pins are engineered for single step masterkeying, creating the largest masterkey capabilities of any pin tumbler lock in production.

Part No.	Description
ASS 867070	Master Pins #1
ASS 867071	Master Pins #2
ASS 867072	Master Pins #3
ASS 867073	Master Pins #4
ASS 867074	Master Pins #5
ASS 867075	Master Pins #6
ASS 867076	Master Pins #7
ASS 867077	Master Pins #8

*Pins listed above use the 867065 Cylinder Spring.*

**Driver Pins**

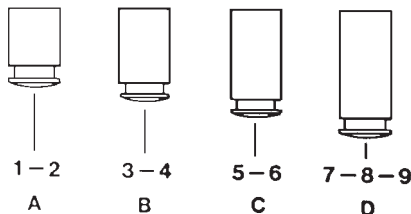

Part No.	Description
ASS 867066	Driver Pins 1-2
ASS 867067	Driver Pins 3-4
ASS 867068	Driver Pins 5-6
ASS 867069	Driver Pins 7-8-9

**MISCELLANEOUS**

**Cylinder Lubricant**



ASSA dry film lubricant is specially designed to increase the life of cylinders and help decrease the problems caused by dirt, grime and other damaging factors. The tough dry film clings to metal and is not affected by water, dirt or extreme temperatures.

Object air-dries quickly in a few minutes. Allow approximately 30 minutes before inserting key into cylinder.

Part No.	Description
ASS 802631	Assa Lock Spray Lube