


**CHAINS, LINKS AND SNAPS**


**Proof Coil Chain**

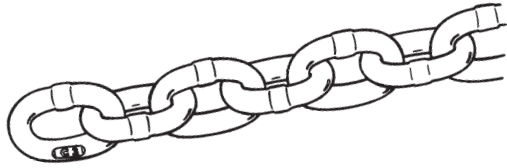

Excellent general purpose chain of standard commercial quality for all ordinary applications not requiring high strength to weight ratios. Frequently used for fabricating tow chains, binding or tie-down chain and logging chain. All sizes are Blue-Krome™ plated; Campbell Chain's method of plating that produces a brighter, more attractive rust resistant zinc plated finish. Supplied on reels. Other sizes available on F/O. Do not use for overhead lifting (Cam-Alloy Chain available on F/O for that purpose).

Part No.	Size	Inside Length"	Inside Width"	Links Per Ft.	Working Load Limit
CMB 072-2127	1/4 × 65'	1.20"	.45"	10	1300 lbs.
CMB 072-2227	5/16 × 60'	1.27"	.47"	9 1/2	1900 lbs.
CMB 072-2327	3/8 × 35'	1.36"	.57"	9	2650 lbs.
CMB 072-5027	3/16 × 100'	.95"	.34"	12 1/2	800 lbs.


**Passing Link Chain**

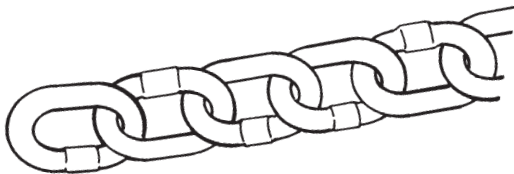

General utility use, electrically welded chain. Wide link design permits links to pass one another freely, minimizing kinking and tangling. Made of low carbon steel, non-heat treated. Supplied on 125' reels. Blu-Krome™ finish. Other sizes available on F/O.

Part No.	Trade Size	Material Dia.	Inside Length"	Inside Width"	Links Per Ft.	Working Load Limit
CMB 072-2927	2/0	.192"	.875"	.47"	13 3/4	450 lbs.

**Straight Link Coil Chain**

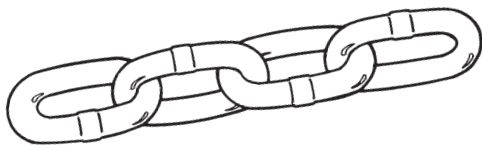

Electrically welded, low carbon steel chain. Typically used for tailgates, barrier guards and animal ties, also for hundreds of other uses where a chain with relatively long, straight links is suitable. Blue-Krome™ plated. Supplied on 125' reels. Other sizes available on F/O.

Part No.	Trade Size	Material Dia.	Inside Length"	Inside Width"	Links Per Ft.	Working Load Limit
CMB 072-3627	2/0	.192"	1.29"	.32"	9 1/2	520 lbs.


**Sash Chain**



Counter-balance chain for double hung sash windows, arc lamp chain and animal chain; suitable for applications requiring flat metal chain operating over pulleys. Low-carbon steel, Blue-Krome™ plated. Supplied in 100' reels. Other sizes available on F/O.

Part No.	Trade Size	Material Dia.	Inside Length"	Links Per Ft.	Working Load Limit
CMB 072-3727	35	.035"	.59"	20	106 lbs.


**Quick Links**



Fast, easy connections for permanent or temporary applications with low carbon chain. Packed 10 per box.

Part No.	Size	Working Load Limit
CMB B764-5106	1/8"	220 lbs.
CMB B764-5126	1/4"	880 lbs.
CMB B764-5136	5/16"	1760 lbs.
CMB B764-5146	3/8"	2220 lbs.

**Malleable Iron Swivel Round Eye Snaps**

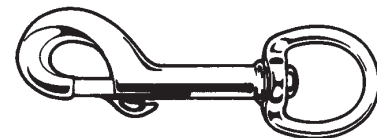

Manufactured strictly to government and commercial specifications. Campbell high strength snaps are larger, stronger and longer lasting. Packed bulk, 10 per box.

Part No.	Overall Length	Inside Eye Diameter	Snap bolt Opening
CMB B760-5801	4"	5/8"	3/8"
CMB B760-5811	4 1/8"	3/4"	3/8"